

# LED LR40-RGBW 610 PMMA<sub>d</sub>-M12-57



Art. Nr. 1-000000-06973

Ktl. Nr. 15070984

EAN Nr. 4260654163766



## Normen / Norms

DIN EN 60598-1 :2021/A11:2022


DIN EN 60529 :1991/A2:2013/AC:2019-02

DIN EN 55015:2019+A11:2020

DIN EN IEC 63000:2018

DIN EN 61547:2009

DIN EN 62471:2009

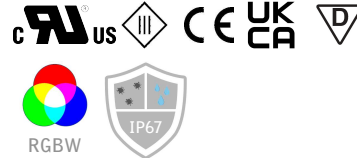


## Elektrische Rahmenbedingungen / Electrical characteristic

|                                  |                            |
|----------------------------------|----------------------------|
| Netzanschluss / Main Supply      | 24 VDC                     |
| Leistung / Power (W   R   G   B) | 11,5W   6,2W   5,2W   5,2W |
| Dimmbar / Dimmable               | PWM                        |
| Anschluss / Connection Type      | M12, 5-Pol, A-Cod.         |
| Durchschleifbar / Loophthrough   | Nein / No                  |
| Pinbelegung / Pin assignment     |                            |


## Licht / Light

|                                                      |                                |
|------------------------------------------------------|--------------------------------|
| Bestückt / Fitted With                               | LED                            |
| Lichtfarbe / Light Colour                            | 5700 K                         |
| Lichtstrom(Brutto) / Lum. Flux(Gross)(W   R   G   B) | 1704lm   249lm   662lm   175lm |
| Lichtstrom(Netto) / Lum. Flux(Net)(W   R   G   B)    | 1187lm   177lm   416lm   117lm |
| Effizienz(Brutto) / Efficiency(Gross)(W)             | 148lm/W                        |
| Effizienz(Netto) / Efficiency(Net)(W)                | 103lm/W                        |
| Abstrahlwinkel / Beam Angle                          | 100°                           |
| Farbtreue / Colour Rendering                         | RA / CRI >80                   |
| Photobiological Safety                               | RG-1                           |

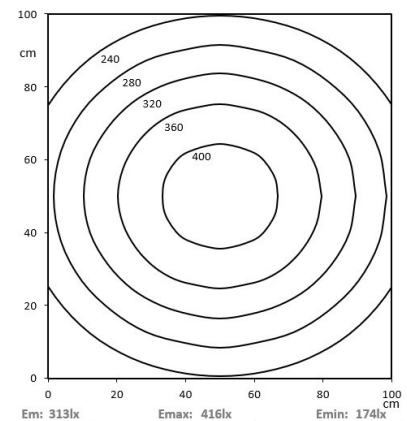

## Mechanik / Mechanics

|                                      |                            |
|--------------------------------------|----------------------------|
| Gehäuse / Housing                    | Aluminium                  |
| Abdeckung / Cover                    | PMMA, Diff.                |
| Drehbar / Rotatable                  | Ja / Yes                   |
| Gewicht(Netto) / Weight(Net)         | 0,73 kg                    |
| Betriebstemperatur / Operating Temp. | -20°C / +50°C              |
| Lebensdauer / Lifetime               | min. 60000 h               |
| Befestigung / Fastening              | 2x Endhalter / 2x Brackets |

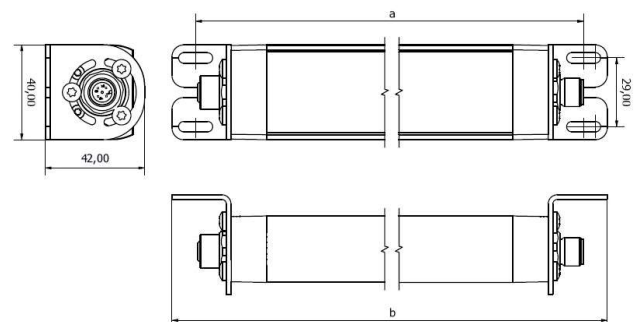

a= 640mm b= 660mm

\*Technische Änderungen vorbehalten | technical modifications reserved