

HELULIGHT® SMART-PROCESS 1000



Art. Nr. 11029501

ID 1-000000-07829

EAN Nr. 4260654160079



Normen / Norms

DIN EN 60598-1 :2021/A11:2022

DIN EN 60529 :1991/A2:2013/AC:2019-02

EN IEC 61000-6-4

DIN EN IEC 63000:2018

DIN EN 61547:2009

DIN EN 62471:2009



Elektrische Rahmenbedingungen / Electrical characteristic


Netzanschluss / Main Supply	12-30 VDC
Leistung / Power (R G B)	7W 7W 7W
Dimmbar / Dimmable	stepless
Anschluss / Connection Type	M8, 5-Pol, B-Cod.
Durchschleifbar / Loopthrough	Nein / No
Pinbelegung / Pin assignment	

Licht / Light

Bestückt / Fitted With	LED
Lichtfarbe / Light Colour	-
Lichstrom(Brutto) / Lum. Flux(Gross)(R G B)	120lm 332lm 76lm
Lichstrom(Netto) / Lum. Flux(Net)(R G B)	96lm 290lm 66lm
Effizienz(Brutto) / Efficiency(Gross)(W)	-
Effizienz(Netto) / Efficiency(Net)(W)	-
Abstrahlwinkel / Beam Angle	100°
Farbtreue / Colour Rendering	-
Photobiological Safety	RG-1

Mechanik / Mechanics

Gehäuse / Housing	Aluminium
Abdeckung / Cover	PMMA, Diff.
Drehbar / Rotatable	Nein / No
Gewicht(Netto) / Weight(Net)	0,84 kg
Betriebstemperatur / Operating Temp.	-20°C / +60°C
Lebensdauer / Lifetime	min. 60000 h
Befestigung / Fastening	-

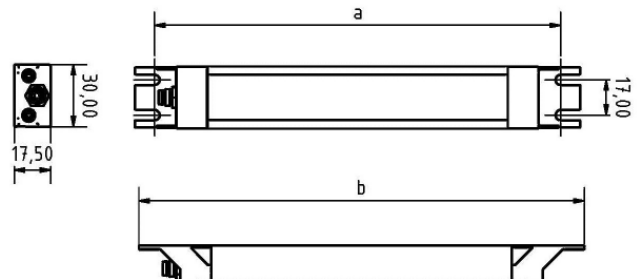

a= 1063mm b= 1075mm

*Technische Änderungen vorbehalten | technical modifications reserved