

LED ELN-RGB 280 PMMA_d-M8_d

Art. Nr. 1-000000-06985

Ktl. Nr. 15071013

EAN Nr. 4260654163445



Normen / Norms

DIN EN 60598-1 :2021/A11:2022

DIN EN 60529 :1991/A2:2013/AC:2019-02

DIN EN 55015:2019+A11:2020

DIN EN IEC 63000:2018

DIN EN 61547:2009

DIN EN 62471:2009



Elektrische Rahmenbedingungen / Electrical characteristic


Netzanschluss / Main Supply	24 VDC
Leistung / Power (R G B)	2,1W 0,9W 2,4W
Dimmbar / Dimmable	PWM
Anschluss / Connection Type	M8, 4-Pol, A-Cod.
Durchschleifbar / Loophthrough	Ja / Yes
Pinbelegung / Pin assignment	

Licht / Light

Bestückt / Fitted With	LED
Lichtfarbe / Light Colour	-
Lichstrom(Brutto) / Lum. Flux(Gross)(R G B)	59lm 101lm 42lm
Lichstrom(Netto) / Lum. Flux(Net)(R G B)	44lm 71lm 29lm
Effizienz(Brutto) / Efficiency(Gross)(W)	-
Effizienz(Netto) / Efficiency(Net)(W)	-
Abstrahlwinkel / Beam Angle	120°
Farbtreue / Colour Rendering	-
Photobiological Safety	RG-1

Mechanik / Mechanics

Gehäuse / Housing	Aluminium
Abdeckung / Cover	PMMA, Diff.
Drehbar / Rotatable	Ja / Yes
Gewicht(Netto) / Weight(Net)	0,18 kg
Betriebstemperatur / Operating Temp.	-20°C / +50°C
Lebensdauer / Lifetime	min. 60000 h
Befestigung / Fastening	2x Endhalter / 2x Brackets

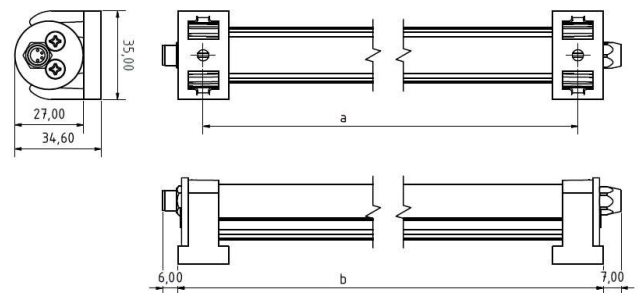

a= 290mm b= 306,5mm

*Technische Änderungen vorbehalten | technical modifications reserved