

LED APL-RGBW 840 PMMA_d-M12-57



Art. Nr. 1-000000-06929

Ktl. Nr. 15070913

EAN Nr. 4260654160253

Normen / Norms

DIN EN 60598-1 :2021/A11:2022

DIN EN 60529 :1991/A2:2013/AC:2019-02

DIN EN 55015:2019+A11:2020

DIN EN IEC 63000:2018

DIN EN 61547:2009

DIN EN 12464-1

DIN EN 62471:2009




Elektrische Rahmenbedingungen / Electrical characteristic

Netzanschluss / Main Supply	24 VDC
Leistung / Power (W R G B)	34,4W 18,6W 15,7W 15,7W
Dimmbar / Dimmable	PWM
Anschluss / Connection Type	M12, 5-Pol, A-Cod.
Durchschleifbar / Loophthrough	Nein / No
Pinbelegung / Pin assignment	


Licht / Light

Bestückt / Fitted With	LED
Lichtfarbe / Light Colour	5700 K
Lichtstrom(Brutto) / Lum. Flux(Gross)(W R G B)	5112lm 747lm 1986lm 525lm
Lichtstrom(Netto) / Lum. Flux(Net)(W R G B)	3768lm 555lm 1348lm 363lm
Effizienz(Brutto) / Efficiency(Gross)(W)	149lm/W
Effizienz(Netto) / Efficiency(Net)(W)	110lm/W
Abstrahlwinkel / Beam Angle	100°
Farbtreue / Colour Rendering	RA / CRI >80
Photobiological Safety	RG-1

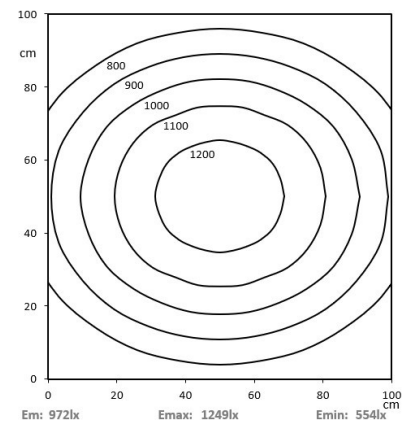

Mechanik / Mechanics

Gehäuse / Housing	Aluminium
Abdeckung / Cover	PMMA, Diff.
Drehbar / Rotatable	Nein / No
Gewicht(Netto) / Weight(Net)	2,2 kg
Betriebstemperatur / Operating Temp.	-20°C / +50°C
Lebensdauer / Lifetime	min. 60000 h
Befestigung / Fastening	-

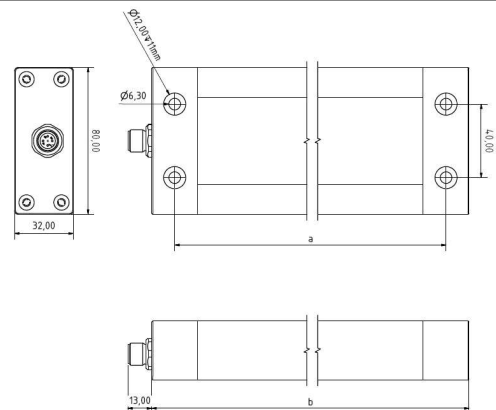

a= 885mm b= 910mm

*Technische Änderungen vorbehalten | technical modifications reserved