

# LED SL-SMART 1000 S-PMMA<sub>d</sub>-M8



Art. Nr. 1-000000-07829

Ktl. Nr. 15071151

EAN Nr.



## Normen / Norms

DIN EN 60598-1 :2021/A11:2022

DIN EN 60529 :1991/A2:2013/AC:2019-02

EN IEC 61000-6-4

DIN EN IEC 63000:2018

DIN EN 61547:2009

DIN EN 62471:2009



## Elektrische Rahmenbedingungen / Electrical characteristic


|                               |                   |
|-------------------------------|-------------------|
| Netzanschluss / Main Supply   | 24 VDC            |
| Leistung / Power (R   G   B)  | 7W   7W   7W      |
| Dimmbar / Dimmable            | stepless          |
| Anschluss / Connection Type   | M8, 5-Pol, B-Cod. |
| Durchschleifbar / Loopthrough | Nein / No         |
| Pinbelegung / Pin assignment  |                   |

## Licht / Light

|                                                 |                      |
|-------------------------------------------------|----------------------|
| Bestückt / Fitted With                          | LED                  |
| Lichtfarbe / Light Colour                       | -                    |
| Lichstrom(Brutto) / Lum. Flux(Gross)(R   G   B) | 120lm   332lm   76lm |
| Lichstrom(Netto) / Lum. Flux(Net)(R   G   B)    | 96lm   290lm   66lm  |
| Effizienz(Brutto) / Efficiency(Gross)(W)        | -                    |
| Effizienz(Netto) / Efficiency(Net)(W)           | -                    |
| Abstrahlwinkel / Beam Angle                     | 100°                 |
| Farbtreue / Colour Rendering                    | -                    |
| Photobiological Safety                          | RG-1                 |

## Mechanik / Mechanics

|                                      |               |
|--------------------------------------|---------------|
| Gehäuse / Housing                    | Aluminium     |
| Abdeckung / Cover                    | PMMA, Diff.   |
| Drehbar / Rotatable                  | Nein / No     |
| Gewicht(Netto) / Weight(Net)         | 0,76 kg       |
| Betriebstemperatur / Operating Temp. | -20°C / +60°C |
| Lebensdauer / Lifetime               | min. 60000 h  |
| Befestigung / Fastening              | -             |

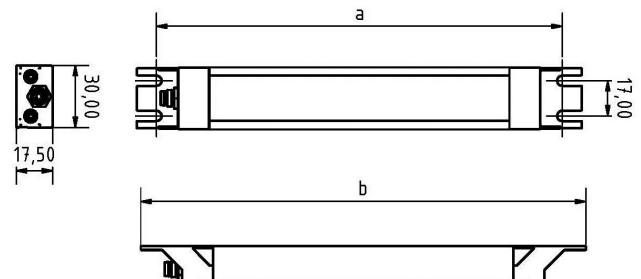

a = 1063mm b = 1075mm

\*Technische Änderungen vorbehalten | technical modifications reserved