

LED ELN-RGBW 840 PMMA_d-M8d-57



Art. Nr. 1-000000-07039

Ktl. Nr. 15070918

EAN Nr. 4260654163896

Normen / Norms

DIN EN 60598-1 :2021/A11:2022

DIN EN 60529 :1991/A2:2013/AC:2019-02

DIN EN 55015:2019+A11:2020

DIN EN IEC 63000:2018

DIN EN 61547:2009

DIN EN 62471:2009




Elektrische Rahmenbedingungen / Electrical characteristic

Netzanschluss / Main Supply	24 VDC
Leistung / Power (W R G B)	17,2W 9,3W 7,9W 7,9W
Dimmbar / Dimmable	PWM
Anschluss / Connection Type	M8, 5-Pol, B-Cod.
Durchschleifbar / Loophrough	Ja / Yes
Pinbelegung / Pin assignment	


Licht / Light

Bestückt / Fitted With	LED
Lichtfarbe / Light Colour	5700 K
Lichtstrom(Brutto) / Lum. Flux(Gross)(W R G B)	2556lm 374lm 993lm 263lm
Lichtstrom(Netto) / Lum. Flux(Net)(W R G B)	2058lm 292lm 732lm 211lm
Effizienz(Brutto) / Efficiency(Gross)(W)	149lm/W
Effizienz(Netto) / Efficiency(Net)(W)	120lm/W
Abstrahlwinkel / Beam Angle	120°
Farbtreue / Colour Rendering	RA / CRI >80
Photobiological Safety	RG-1

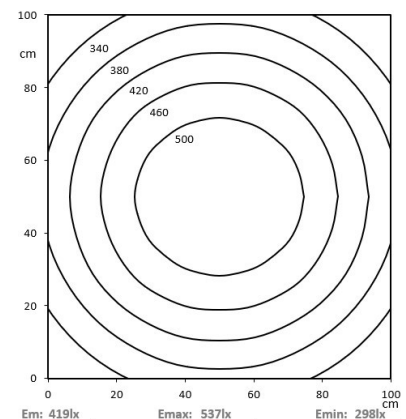

Mechanik / Mechanics

Gehäuse / Housing	Aluminium
Abdeckung / Cover	PMMA, Diff.
Drehbar / Rotatable	Ja / Yes
Gewicht(Netto) / Weight(Net)	0,48 kg
Betriebstemperatur / Operating Temp.	-20°C / +50°C
Lebensdauer / Lifetime	min. 60000 h
Befestigung / Fastening	2x Endhalter / 2x Brackets

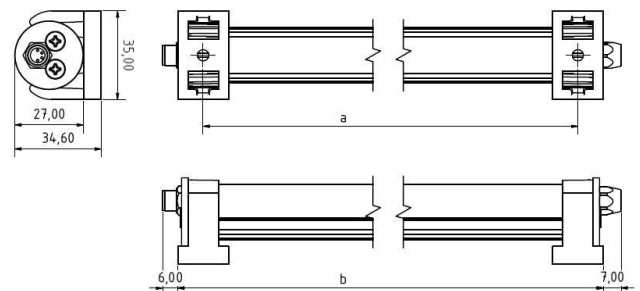

a= 850mm b= 866,5m

*Technische Änderungen vorbehalten | technical modifications reserved